





LINEN

Linen is known as one of the most durable natural fibers with a very soft and light texture. The way linen fabric is woven provides an exceptional performance in hot and humid weather as well as a unique pattern that brings a sense of freshness and calmness.




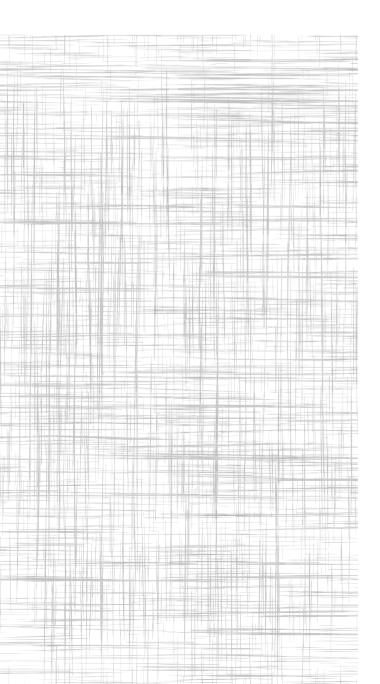

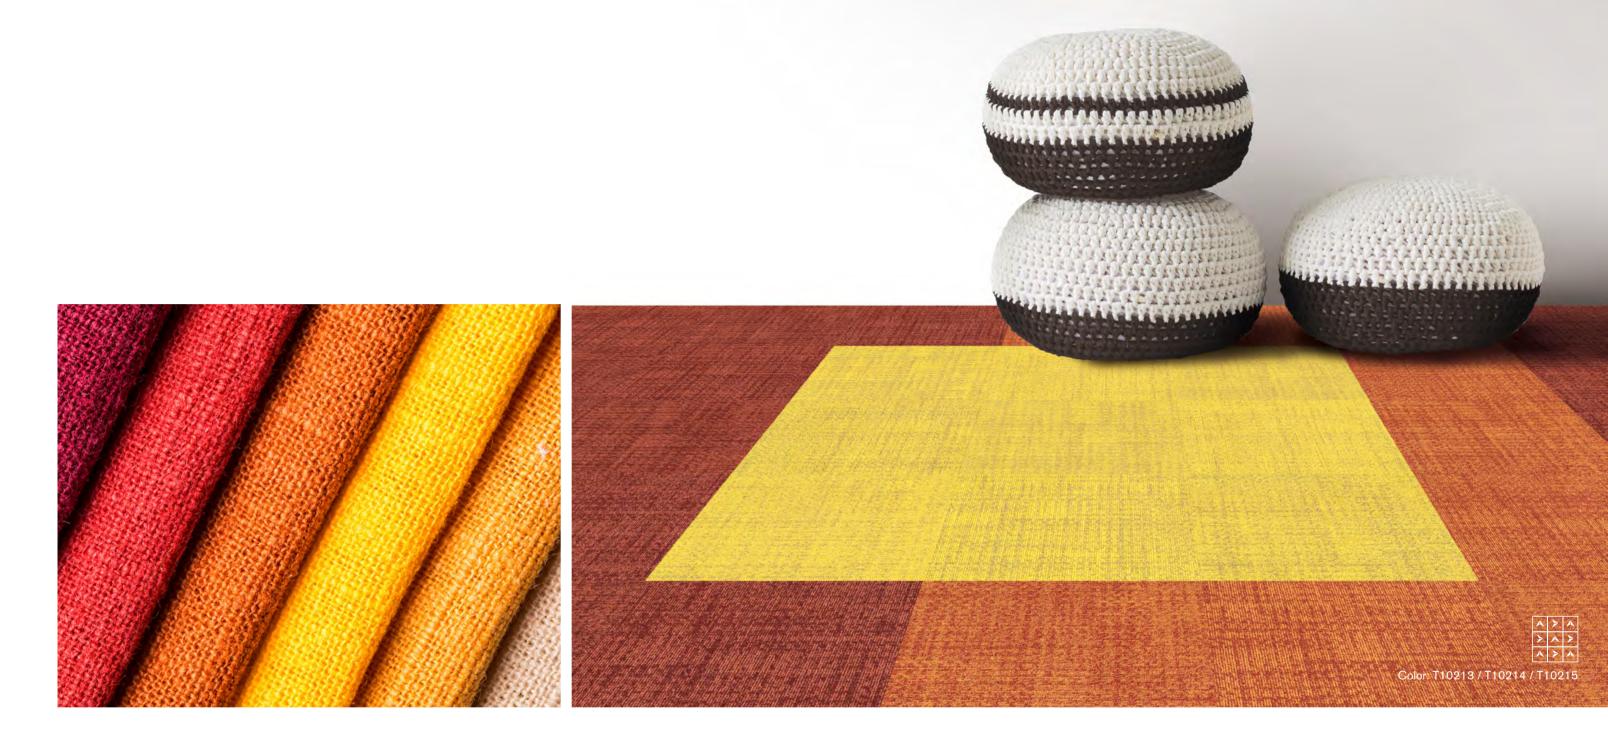

Perennial

It has been more than ten thousand years since mankind invented linen fabric but the pattern is still relevant. It's minimal but rich, simple but full. It's a design to return to nature, grow with time and connect to life.

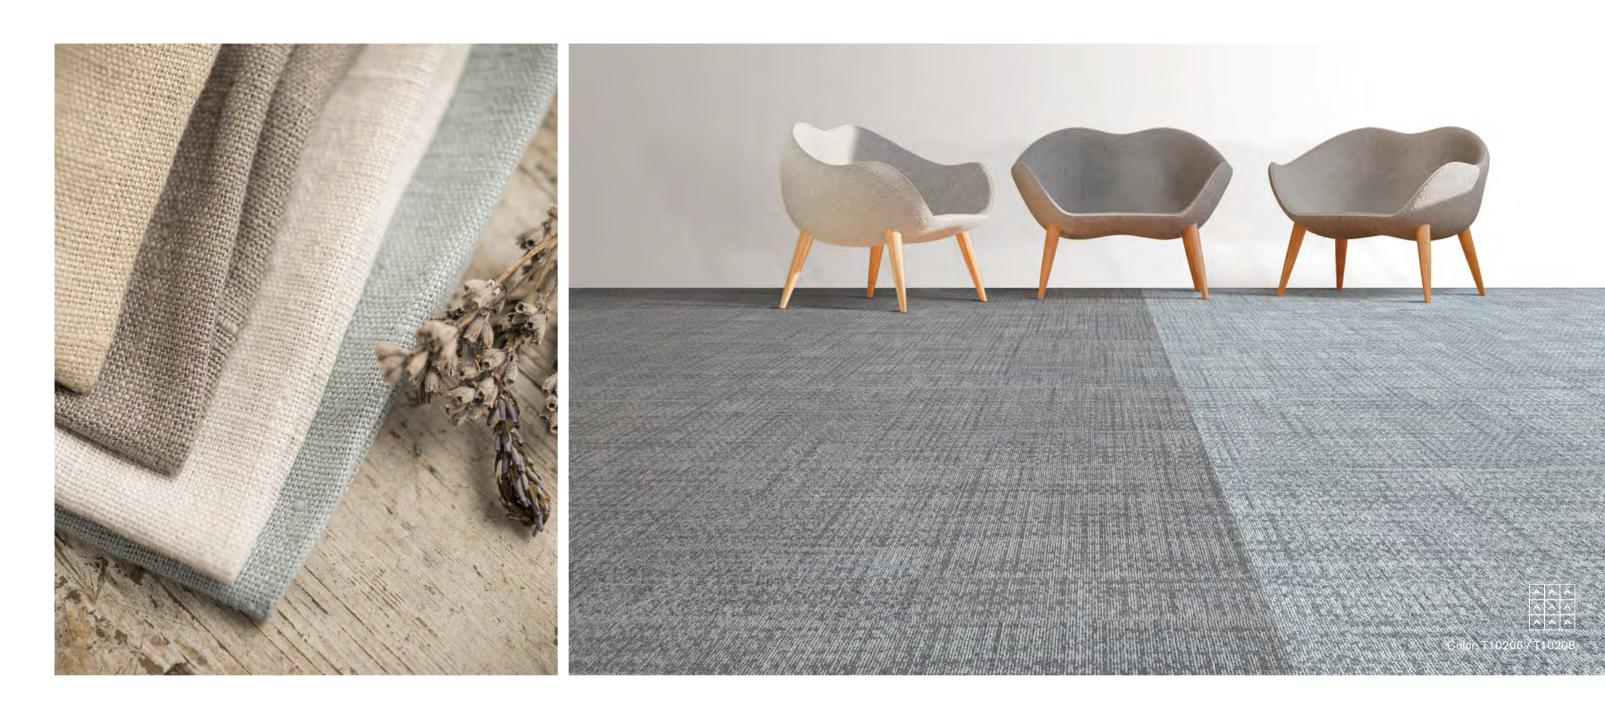


Comfort

Linen fabrics are commonly used for clothing, bedding and other residential purposes and always create a cozy and comfortable feeling. Inspired by the texture of linen fabric, Tuntex is bringing more warmth and comfort into commercial spaces.





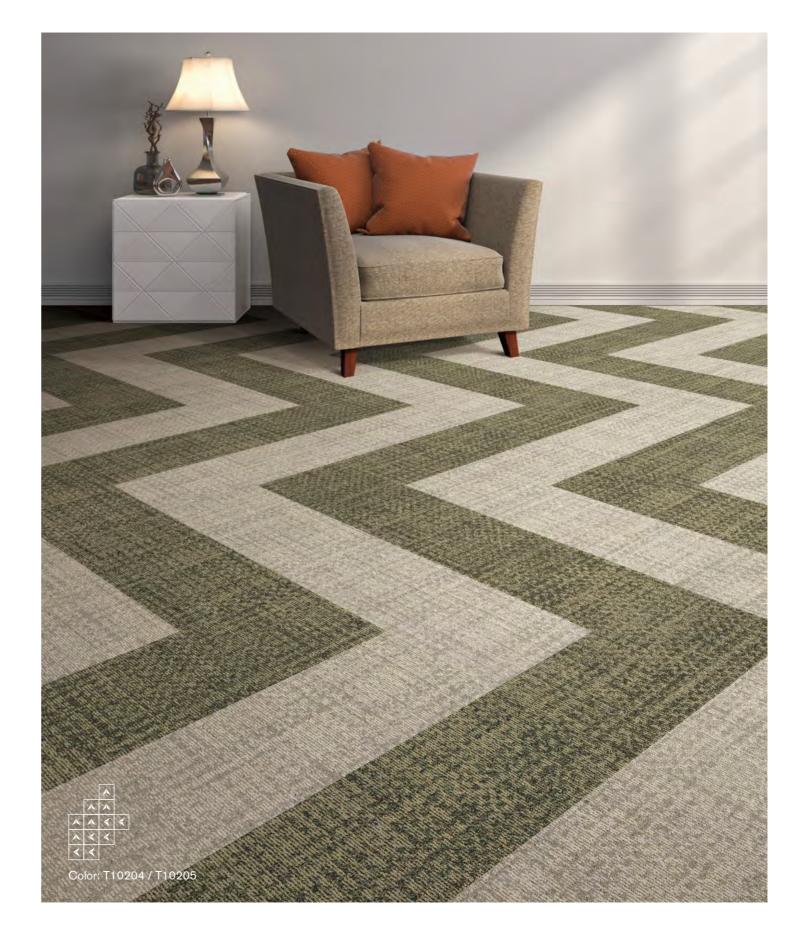







样本中效果图为电脑合成图像,并不代表实际铺装效果。 如有需求,我司可提供多片地毯进行模拟铺装。

All images are computer generated files and may not exactly represent actual installation appearance and tile seams. Full tiles can be provided if requried.









 ∧
 ∧

 ∧
 ∧

 ∧
 ∧

 ∧
 ≺

 ∧
 ≺

 ∨
 ∨

 ∨
 ∨

 Color: T10208 / T10210





T10201 Sugar Cookie	T10202 Brunette
	- Martin State - Andrew Constant
T10203 Umber	T10204 Tortilla
	110204 Tortilla
T10205 Cedar	T10206 Cloud
T10207 Coin	T10208 Fossil
T10209 Shadow	T10210 Pebble
T10211 Aegean	T10212 Slate
110211 Aegean	110212 Olate
T10213 Blush	T10214 Orange
T10215 Mustard	T10216 Moss
T10217 Azure	T10218 Admiral

Style	T102 "Linen"
Construction	Hi / Mid / Lo Loop
Pile Fibre	nexlon™ Standard+Quartz Premium Solution Dyed Nylon with Stain & Soil Resist technology
Dye Method	Solution Dyed
Gauge	1 / 12G
Pile Height	5.5 / 4.5 / 3.0mm
Total Thickness	7.5mm(±0.5mm)
Tile size	500mm x 500mm
Total Weight	Approx. 4950g / m ²
Secondary Back	Recyclable TUNTEX Commercial Duraback
Wear Warranty	Product is warranted not to lose more than 10% pile fibre by weight in normal commercial use within 15 years.
Colour Fastness	15 Year Warranty AATCC 16. Grade 4 - Little or no change.
Static Electricity	Permanent Lifetime Protection - less than 2.0 KV.
Stain Resistance	Stainshield Treatment: STAINSHIELD"
Soil Resistance	Soil Guard Treatment: SOILGUARD
Dimensional Stability	Warranted not to change in size by more than 0.5 mm in normal use. Will not dome or dish in normal use.
Installation	Tackifier or Releasable adhesive Recommended.
Sustainability	All yarns used are Solution dyed to minimise use of water and exclude any effluent production. ISO 14001 and ISO 9001.

Health Product Declaration (HPD) Third Party verified by U.S. GreenCircle Certified.

Environmental Product Declaration (EPD) certified by UL.

U.S. CRI Green Label Plus Certificate.

Singapore Green Building Council Product Certificate - 4 Ticks "Leader".

Passes ASTM Flammability Test. Flammability: Passes (ASTM E648) Smoke Density: Passes (ASTM E662)

Passes AATCC Static Propensity Test. Static Propensity: ≤3.5 KV (AATCC 134)

Passes the Quality Test of China National Carpet Quality Test Center.

Passes the Flammability Test and Environmental Protection Test of the China National Fire and Construction Quality Surveillance Center.

ISO 9001 Quality Management System.

ISO 14001 Environmental Management System.

ISO 45001 Healthy & Safety Management System.

Passes EN 13501 European Fire Test Bfl.

Passes EN 1307 Wear Rating Class 33 - Heavy Commercial.









