


HOMOGENEOUS RESILIENT FLOORING



HOMOGENEOUS RESILIENT FLOORING

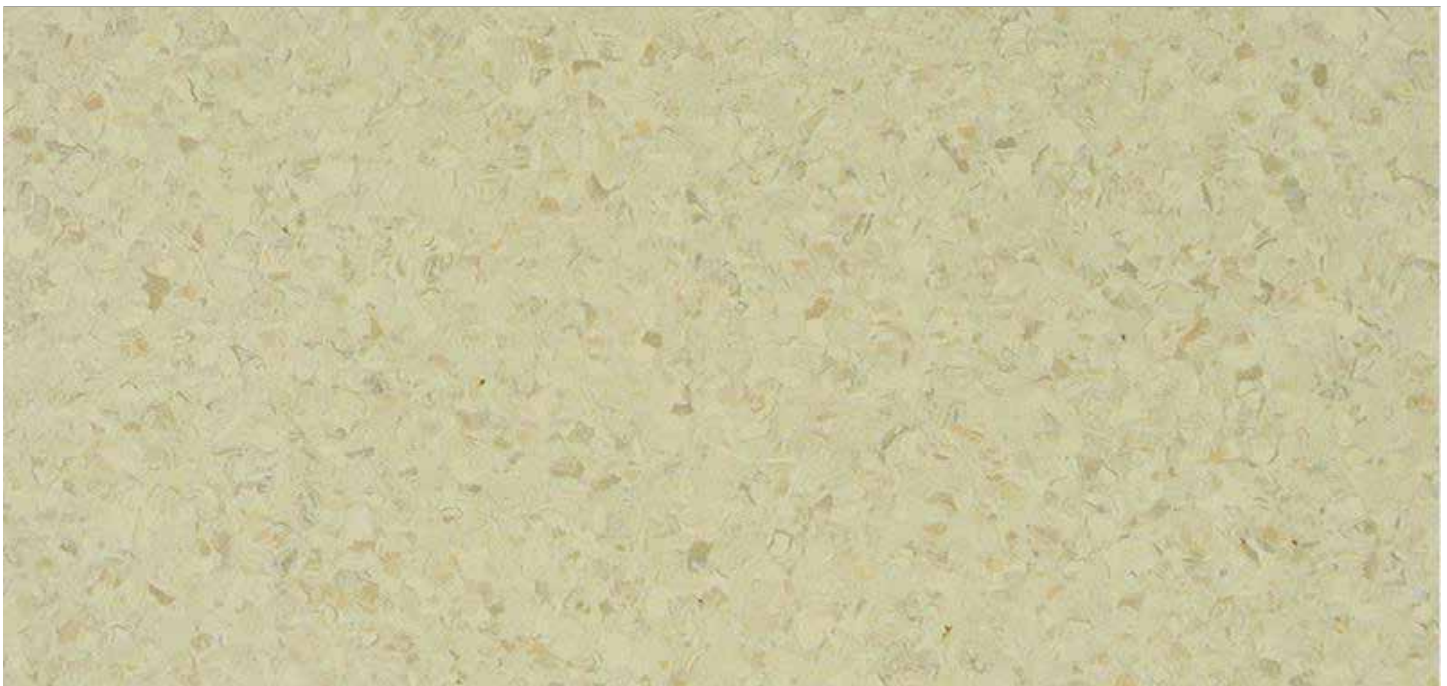

Jeo Premium



JF6008




JF6026



JF6031




JF6007

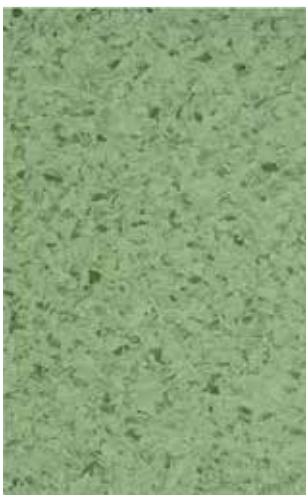


JF6005



JF6003

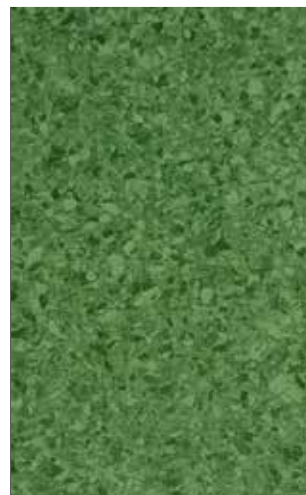

JF6010

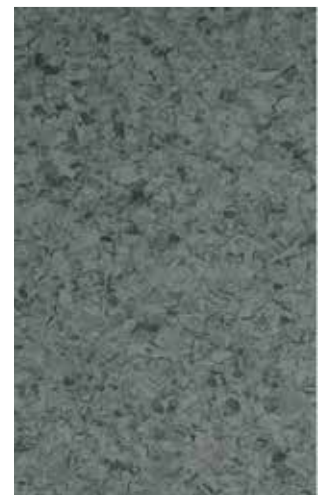

JF6020



JF6022



JF6032



JF6018



JF6027

Jeo Premium



JF6016




JF6023



JF6012



JF6021

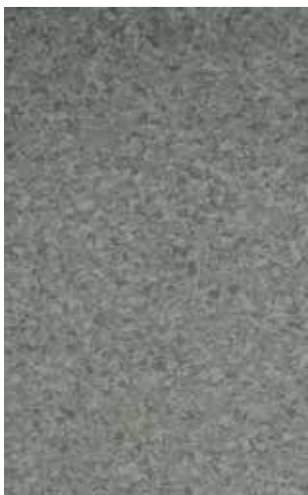

JF6029



JF6001



JF6002



JF6006



JF6030



JF6017



JF6019



JF6013



Creating Ideas
for Better Living

TECHNICAL SPECIFICATIONS

DESCRIPTION			
Total thickness	EN 428	mm	2.0
Weight	EN 430	g/m ²	2850
Width of sheet	EN 426	m	2
Length of sheet	EN 426	lm	20
CLASSIFICATION			
European classification	EN 685		23-33
Fire rating	EN 13501-1		Bfl-s1
Toxic testing	GB 18586-2001		Qualified
Static electrical propensity	EN 1815	KV	≤ 2
Electrical resistance	EN 1081	Ω	10 ⁹ -10 ¹⁰
Slip resistance	DIN 51130	Class	R9
PERFORMANCES			
Wear group	EN 660	group	T
Type binder content	ISO 10581	Type	II
Dimensional stability	EN 434	%	≤ 0.05
Residual indentation	EN 433	mm	0.03
Colour fastness	EN ISO 105 - B02	degree	≥ 6
Chemical products resistance	EN 423		OK
Anti-bacterial and fungicidal treatment	JIS Z 2801		OK
Special maintenance treatment	W/(m.K)		PUR
Mold resistance	DIN ENISO846-A/C		No bacteria growth



LCA

Eco-designed according to a product specific life cycle analysis



INDOOR AIR QUALITY

100 times lower than norm requirements
[TVOC < 10 µg/m³ after 28 days]



RECYCLED CONTENT

100 % REACH compliant recycled content



COMPOSITION

100% REACH compliant



WELLNESS

Walking comfort: < 75 dB



RECYCLABILITY

100 %

Be connected!



#Jeoflor



Jeoflor

Our related products!



Floor Self Leveling



Wall Coverings & Protections



Skirting & Profiles



Handrails

Jeoflor

Alptahls GmbH, Bürgergasse 4, 8330 Feldbach, Austria.

Tel. +43 (0)3152 370 49

info@jeoflor.com www.jeoflor.com

Toll Free : 18002028498